

Straight Truck

"Lock-Down" Systems Spec Sheet (Mesh or Sealed Applications)

Please use inches for unit measurement.

A. Critical Application Considerations & Required Trailer Measurements:

To Mount a system on a straight truck the truck must be flat on top.

These systems have 14" arch therefore your bow arch must match.

Do you want Roll-Rite® flexible bows or are you using other bows?

Roll-Rite® Other

Do you want an arm front and rear or front only?

Front Dual

If single arm, which style rear tarp return will be used?

Roll-Rite® Strap Roll-Rite® MultiFlex Arm Other

Does your application require a Mesh or Vinyl tarp?

Mesh Vinyl

If Mesh, what type of load are you hauling? _____

Do you need any of the following?

Wireless Remote Control


Outdoor Mounted Switch

NOTE #1:

This system will not work if there is a large drop from the cabguard down to the boards. This system will add to the overall height of truck.

NOTE #2:

If exhaust stack extends up beside the cab shield, the stack may need to be re-positioned. Call toll-free 1-800-297-9905 for assistance.

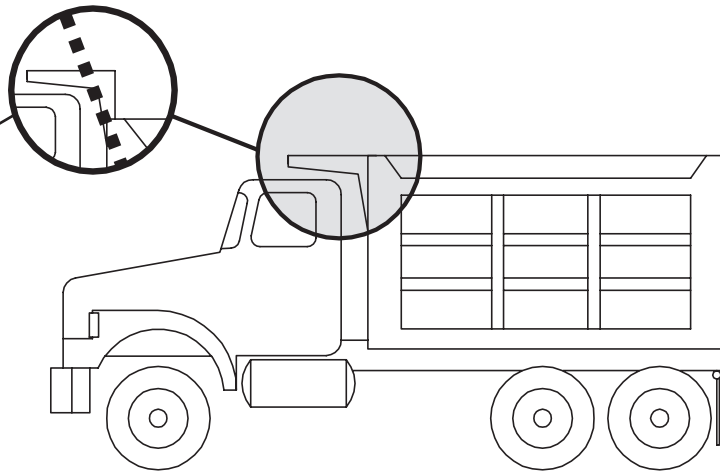

Required Truck Measurements:


_____ = (A) Box Length

_____ = (B) Cab Guard Length

_____ = (C) Inside Box Width

_____ = (D) Outside Box Width

_____ = (E) Outside Cab Guard Width

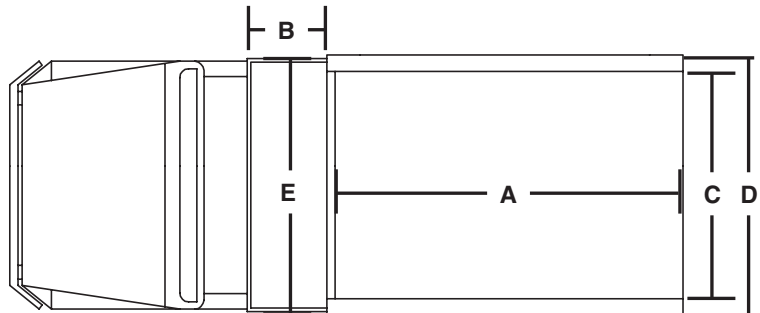

Automated Covering Systems
A Safe Fleet Brand

Inside Sales & Service: 1-800-297-9905 • FAX: 989-246-1035